

LEDテープライト (SMD5050スタンダード/RGB)

qcledlight(株)


製品型番	QC-DT-30-5050-12	QC-DT-30-5050-24	QC-DT-60-5050-12	QC-DT-60-5050-24	QC-DT-120-5050-12	QC-DT-120-5050-24
LEDチップ	SMD5050		SMD5050		SMD5050	
LED数量	30LED/M		60LED/M		120LED/M	
消費電力	7.2W/M		14.4W/M		28.5W/M	
カラー	R.G.B.電球色.白色.RGB		R.G.B.電球色.白色.RGB		R.G.B.電球色.白色	
保護等級	IP20 . IP65 . IP67 . IP68		IP20 . IP65 . IP67 . IP68		IP20 . IP65 . IP67 . IP68	
最大点灯距離	5Mまで		5Mまで		5Mまで	
基盤の色	白色		白色		白色	
基盤の幅	10mm		10mm		15mm	
動作環境温度	零下5° C～50° C		零下5° C～50° C		零下5° C～50° C	
動作電圧	12V DC	24V DC	12V DC	24V DC	12V DC	24V DC
切断長	100mm(3LED)	16.6mm(5LED)	50mm(3LED)	100mm(6LED)	50mm(6LED)	50mm(6LED)

IP保護




※細かな仕様は予告なく変更される場合がございますので予めご了承ください。


QC-DT-30-5050-12(单色)

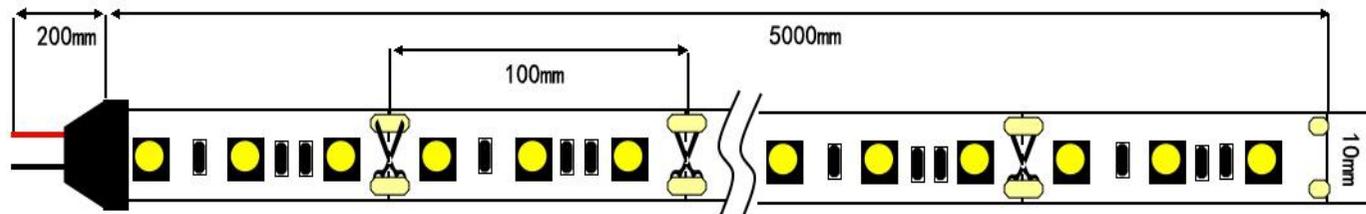


QC-DT-30-5050-24(单色)

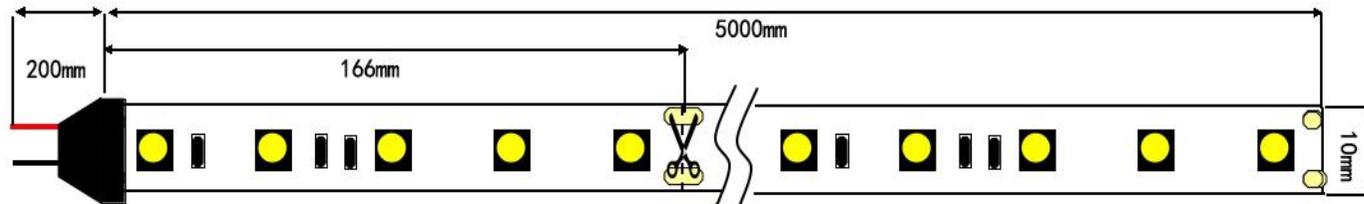


QC-DT-60-5050-12(单色)

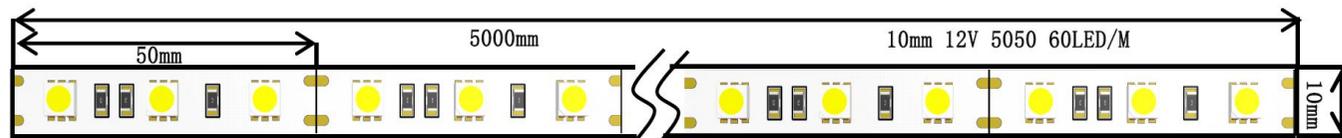


QC-DT-60-5050-12(RGB)

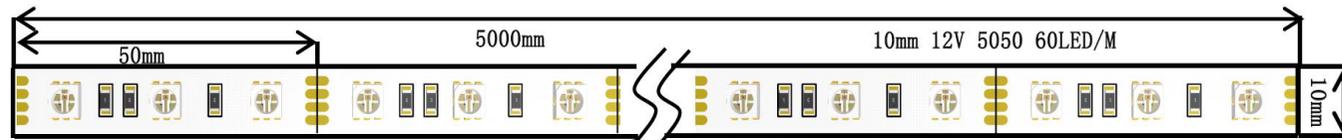

QC-DT-60-5050-24(单色)

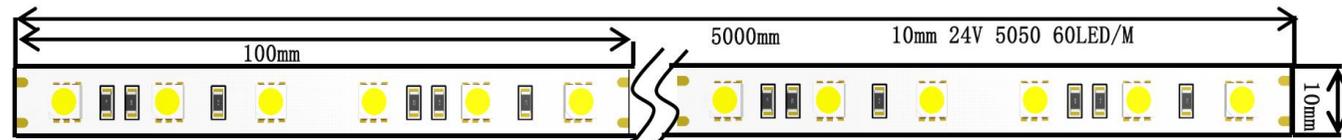


QC-DT-60-5050-24(RGB)

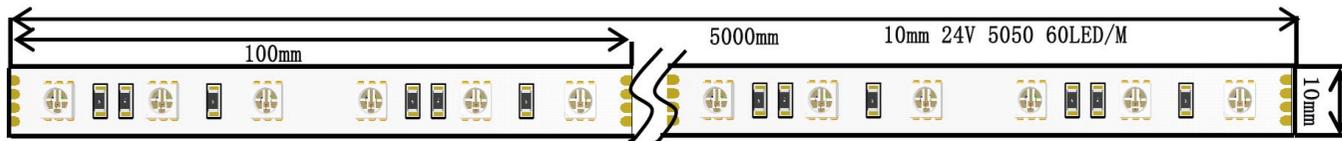

15MM 12V 5050 120LED/M

QC-DT-120-5050-12

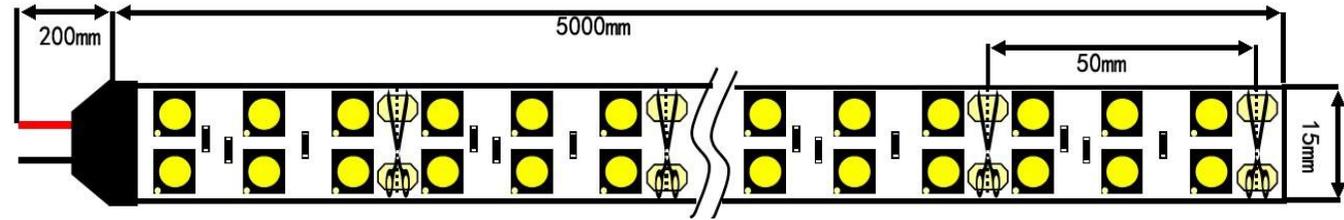

15MM 24V 5050 120LED/M

QC-DT-120-5050-24

