



## ■ Features

- 1.65"x0.88" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/BS EN/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption < 0.075W
- Extremely low leakage current
- Wide operating temp. range -40 ~ +85°C
- EMI class B for class II configuration
- Protections:  
Short circuit / Overload / Over voltage / Over temperature
- No minimum load required
- Typical lifetime > 52K hours
- 3 years warranty

## ■ Applications


- Portable medical device
- Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument

## ■ Description

MFM-05 is a 5W high density and small size (42\*22.3\*20.5mm) AC/DC on board type medical grade power supply series. It features the operation for 80~264VAC, a low no load power consumption less than 0.075W, a high efficiency up to 82%, Class II (no FG) double insulation, outstanding dissipation, 5G anti-vibration, high EMC performance, 4KVAC isolation, etc. The design observes IEC/BS EN/EN60601-1 and ANSI/AAMI ES60601-1 version three with 2xMOPP level and ultra-low leakage current (<80 μA). It is very suitable for BF (patient contact) type medical device or relevant equipment.

## ■ Model Encoding

**MFM - 05 - 5**

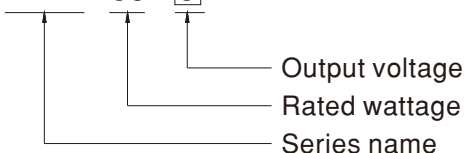

**SPECIFICATION**


| MODEL  |   | MFM-05-3.3   | MFM-05-5                | MFM-05-12  | MFM-05-15  | MFM-05-24                                |  |
|--|---|--|-------------------------|--|--|--|--|
| OUTPUT                                       | DC VOLTAGE                                  | 3.3V   | 5V                      | 12V  | 15V  | 24V                                      |  |
|  | RATED CURRENT                               | 1.25A  | 1A                      | 0.42A  | 0.33A  | 0.23A                                    |  |
|  | CURRENT RANGE <small>Note.2</small>         | 0 ~ 1.25A  | 0 ~ 1A                  | 0 ~ 0.42A  | 0 ~ 0.33A  | 0 ~ 0.23A                                |  |
|  | PEAK CURRENT                                | 1.38A  | 1.1A                    | 0.46A  | 0.36A  | 0.25A                                    |  |
|  | RATED POWER                                 | 4.1W   | 5W                      | 5W   | 5W   | 5.5W                                     |  |
|  | PEAK LOAD(10sec.) <small>Note.3</small>     | 4.6W   | 5.5W                    | 5.5W   | 5.4W   | 6W                                       |  |
|  | RIPPLE & NOISE (max.) <small>Note.4</small> | 100mVp-p   | 100mVp-p                | 150mVp-p   | 150mVp-p   | 180mVp-p                                 |  |
|  | VOLTAGE TOLERANCE <small>Note.5</small>     | ±2.5%  | ±2.5%                   | ±2.5%  | ±2.5%  | ±2.5%                                    |  |
|  | LINE REGULATION                             | ±0.3%  | ±0.3%                   | ±0.3%  | ±0.3%  | ±0.3%                                    |  |
|  | LOAD REGULATION                             | ±0.5%  | ±0.5%                   | ±0.5%  | ±0.5%  | ±0.5%                                    |  |
|  | SETUP, RISE TIME                            | 1000ms, 30ms/230VAC    1000ms, 30ms/115VAC at full load  |                         |  |  |  |  |
| HOLD UP TIME (Typ.)                          | 40ms/230VAC    12ms/115VAC at full load     |  |                         |  |  |  |  |
| INPUT  | VOLTAGE RANGE <small>Note.6</small>         | 80 ~ 264VAC  |                         |  |  |  |  |
|  | FREQUENCY RANGE                             | 47 ~ 440Hz   |                         |  |  |  |  |
|  | EFFICIENCY (Typ.)                           | 74%  | 78%                     | 80%  | 81%  | 82%                                      |  |
|  | AC CURRENT (Typ.)                           | 0.2A/115VAC    0.1A/230VAC   |                         |  |  |  |  |
|  | INRUSH CURRENT (Typ.)                       | COLD START    25A/115VAC    45A/230VAC   |                         |  |  |  |  |
| LEAKAGE CURRENT (max.) <small>Note.7</small> | Touch current <80µA/264VAC                  |  |                         |  |  |  |  |
| PROTECTION                                   | OVERLOAD                                    | 110% ~ 180% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed   |                         |  |  |  |  |
|  | OVER VOLTAGE                                | 3.8 ~ 5V   | 5.75 ~ 6.8V             | 13.8 ~ 16.2V   | 17.3 ~ 20.3V   | 27.6 ~ 32.4V                             |  |
|  | OVER TEMPERATURE                            | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down  |                         |  |  |  |  |
| ENVIRONMENT                                  | WORKING TEMP.                               | -40 ~ +85°C (Refer to "Derating Curve")  |                         |  |  |  |  |
|  | WORKING HUMIDITY                            | 20 ~ 90% RH non-condensing   |                         |  |  |  |  |
|  | STORAGE TEMP., HUMIDITY                     | -40 ~ +100°C, 10 ~ 95% RH non-condensing   |                         |  |  |  |  |
|  | TEMP. COEFFICIENT                           | ±0.03%/°C (0 ~ 60°C)   |                         |  |  |  |  |
|  | SOLDERING TEMPERATURE                       | 260°C ±5°C/10sec.max.  |                         |  |  |  |  |
|  | VIBRATION                                   | 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes  |                         |  |  |  |  |
| OPERATING ALTITUDE <small>Note.8</small>     | 5000 meters                                 |  |                         |  |  |  |  |
| SAFETY & EMC (Note 9)                        | SAFETY STANDARDS                            | IEC60601-1, BS EN/EN60601-1, EAC TP TC 004, UL ANSI/AAMI ES60601-1(3.1 version), CAN/CSA-C22 3 <sup>rd</sup> Edition approved ; Design refer to BS EN/EN60335-1 (by request) |                         |  |  |  |  |
|  | ISOLATION LEVEL                             | Primary-Secondary: 2xMOPP  |                         |  |  |  |  |
|  | WITHSTAND VOLTAGE                           | I/P-O/P:4KVAC  |                         |  |  |  |  |
|  | ISOLATION RESISTANCE                        | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH   |                         |  |  |  |  |
|  | EMC EMISSION                                | Parameter  | Standard                |  |  | Test Level / Note                        |  |
|  |   | Conducted  | BS EN/EN55011 (CISPR11) |  |  | Class B                                  |  |
|  |   | Radiated   | BS EN/EN55011 (CISPR11) |  |  | Class B                                  |  |
|  |   | Harmonic Current   | BS EN/EN61000-3-2       |  |  | Class A                                  |  |
|  |   | Voltage Flicker  | BS EN/EN61000-3-3       |  |  | -----                                    |  |
|  | EMC IMMUNITY                                | BS EN/EN60601-1-2  |                         |  |  |  |  |
|  |   | Parameter  | Standard                |  |  | Test Level / Note                        |  |
|  |   | ESD  | BS EN/EN61000-4-2       |  |  | Level 4, 15KV air ; Level 4, 8KV contact |  |
| RF field susceptibility                      |   | BS EN/EN61000-4-3  |                         |  | Level 3, 10V/m( 80MHz~2.7GHz )<br>Table 9, 9~28V/m( 385MHz~5.78GHz ) |  |  |
| EFT bursts                                   |   | BS EN/EN61000-4-4  |                         |  | Level 3, 2KV   |  |  |
| Surge susceptibility                         |   | BS EN/EN61000-4-5  |                         |  | Level 3, 1KV/Line-Line   |  |  |
| Conducted susceptibility                     |   | BS EN/EN61000-4-6  |                         |  | Level 3, 10V   |  |  |
| Magnetic field immunity                      |   | BS EN/EN61000-4-8  |                         |  | Level 4, 30A/m   |  |  |
| Voltage dip, interruption                    | BS EN/EN61000-4-11                          |  |                         | 100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods |  |  |  |
| OTHERS                                       | MTBF  | 1799.5Khrs min.    MIL-HDBK-217F (25°C)  |                         |  |  |  |  |
|  | DIMENSION                                   | 42*22.3*20.5mm (L*W*H) or 1.65**0.88*0.80" inch  |                         |  |  |  |  |
|  | PACKING                                     | 0.018Kg; 270pcs/5.8Kg/0.94CUFT   |                         |  |  |  |  |

**NOTE**


- All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- No minimum load required.
- 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power
- Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor.
- Tolerance : includes set up tolerance, line regulation and load regulation.
- Derating may be needed under low input voltages. Please check the derating curve for more details.
- Touch current was measured from primary input to DC output.
- The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <http://www.meanwell.com>)

※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>


■ Block Diagram

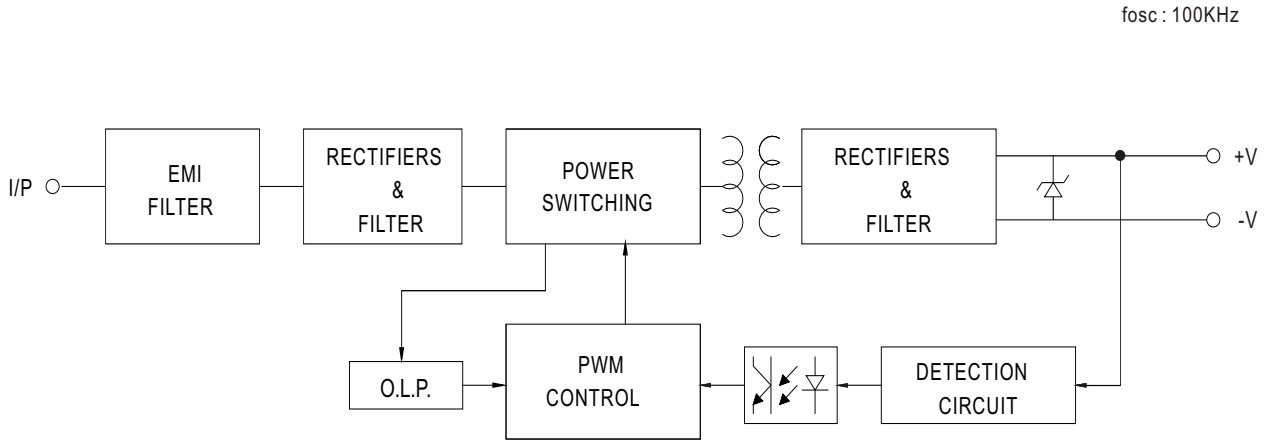

■ Derating Curve


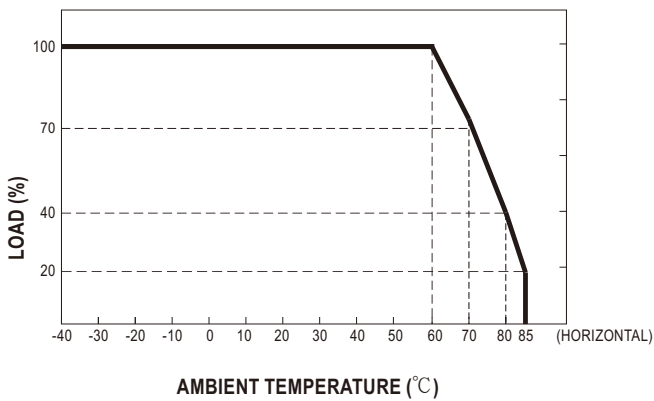


■ Output Derating VS Input Voltage

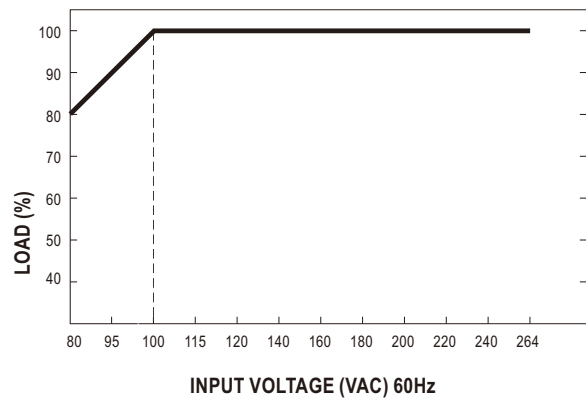

## ■ Mechanical Specification

Unit: mm

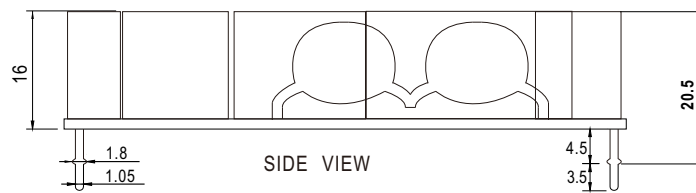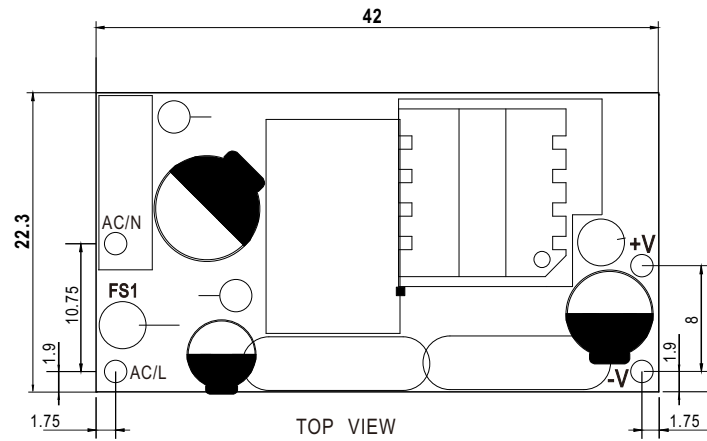

## ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>